

HOTSPOT-X22


Industrial infrared heat detector with programmable internal signal evaluation for the detection of hot surfaces, flames and moving ember – suitable for explosive atmospheres in ATEX zone 22

Characteristics

- Robust design with aluminium diecast housing
- High resistance to moisture and dust (IP 64)
- Extremely fast response
- Detection of embers
- Detection of embers
- Adjustable alarm thresholds up to 16 zones
- Independent of building thermal conditions
- Integrated purge air adapter
- Low wiring effort due to common data and power transmission in a pre-assembled cable
- Central data acquisition and visualization via PC software
- Can be integrated into existing fire alarm systems
- Also suitable for process monitoring
- Certified for use in ATEX zone 22

Applications

- Production sites for coal, biomass, wood, paper, plastic, substitute fuel, etc.
- Storage facilities and bunkers with self-igniting materials
- Drives, shredders, driers, chutes and hoppers
- Silos and mills
- Chemical industry

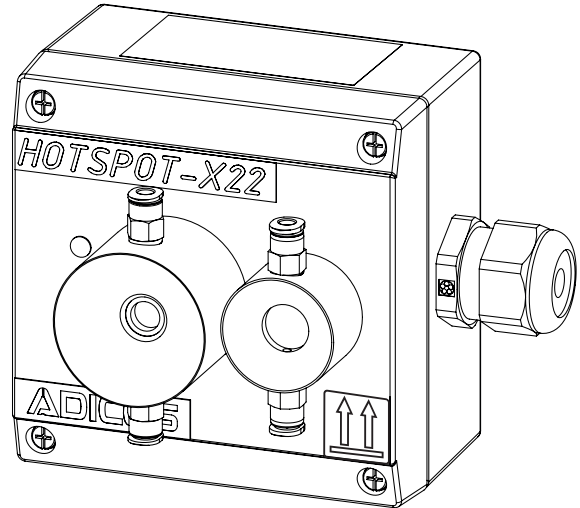

ADICOS HOTSPOT-X22 is a thermographic detector of the Advanced Discovery System („ADICOS“), which was specifically designed to provide reliable early fire detection in harsh industrial environments with explosive atmospheres according to ATEX zone 22.



HOTSPOT-X22 are parametrizable compact infrared camera systems with integrated signal processing and evaluation. An additional conventional camera assists with orientation and alignment. The sturdy design protects against the penetration of dust and moisture. Typical applications are for example the detection of overheating drives or bearings of conveyor systems and the monitoring of spontaneously inflammable bulk materials on conveyor belts or in storage facilities.

A simple wiring concept with prewired ADICOS system cables and specially designed connection boxes keeps the installation simple and fast.

The HOTSPOT-X22 is connected via an ADICOS M-BUSMASTER to a PC. Using the ADICOS system software, the measurement results can be displayed, analyzed and documented. The software allows individual parameterization and adaptation of the alarm thresholds to the environment of the respective detector.


HOTSPOT-X22 – Specifications

Mechanical dimensions

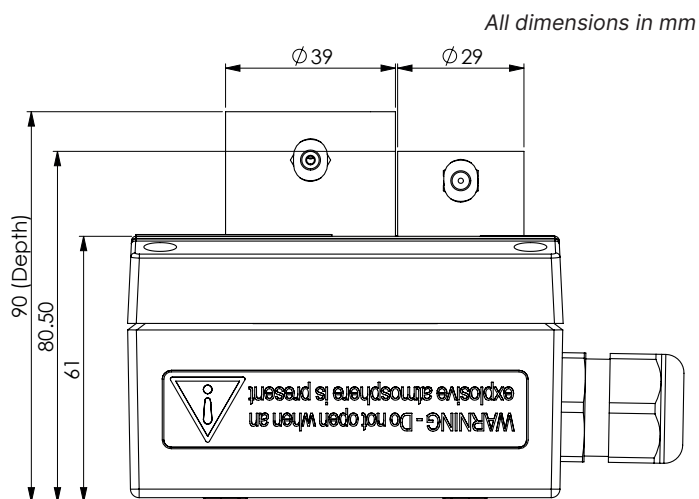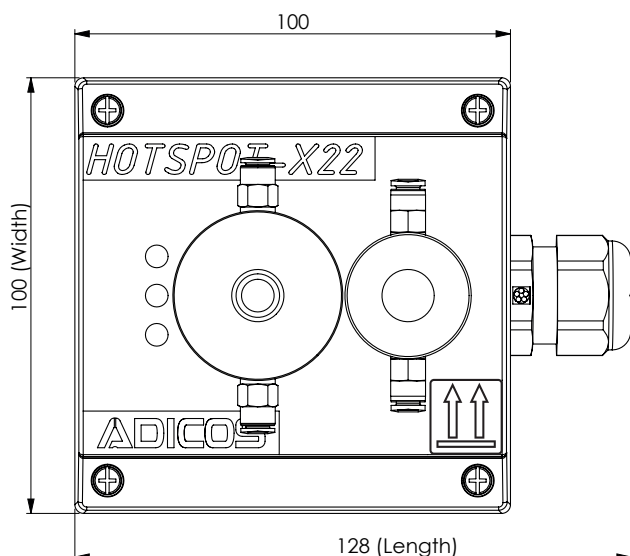

Connection cable Ø13 mm prewired

Mechanical characteristics

Enclosure	Coated aluminum diecast (corrosion-resistant)
Weight	2 kg (with 7 m connection cable)
Degree of protection	IP64
Dimensions	128 mm x 100 mm x 90 mm (Length x Width x Depth), (Length: cable gland included)
Explosion protection	 II 3D Ex tc IIIC T80°C Dc (Certified according to ATEX und IECEx)
Device group	II, category 3D / 3G

Thermal characteristics

Relative humidity	≤ 95 % (non-condensing)
Temperature range	-10 ... +50 °C

Electrical characteristics

Supply voltage	DC 21.6 ... 40 V
Power consumption	2 VA / 10 VA (with / without heating)
Internal fusing	750 mA
M-Bus max. line length	≈ 2 km
M-Bus max. line capacity	≈ 200 nF
M-Bus baudrate	4800 baud
Limit contact alarm relay	20 mA max. (Alarm NO relay)
Limit contact error relay	40 V / 20 mA max. (Error NC relay)
Max. contact rating failure/alarm relay	DC 40 V; 70mA

Purge air requirements

Air purity grade	Dust ≥ 2 — Water ≥ 3 — Oil ≥ 2 (< 0.1 mg/m ³)
Air flow rate, settled air	2 ... 8 l/min (Testing may be necessary!)

Detector characteristics


Sensor resolution	32 Pixel x 31 Pixel
Optical angle	53° x 52°
Reaction time	< 1 s
Temporal resolution	0,1 s oder 1 s (depends on configuration)

Technical changes reserved!

410-2410-005 EN26 – 03/2023 | Page 2 / 4


HOTSPOT-X22 – Specifications

Electrical connection

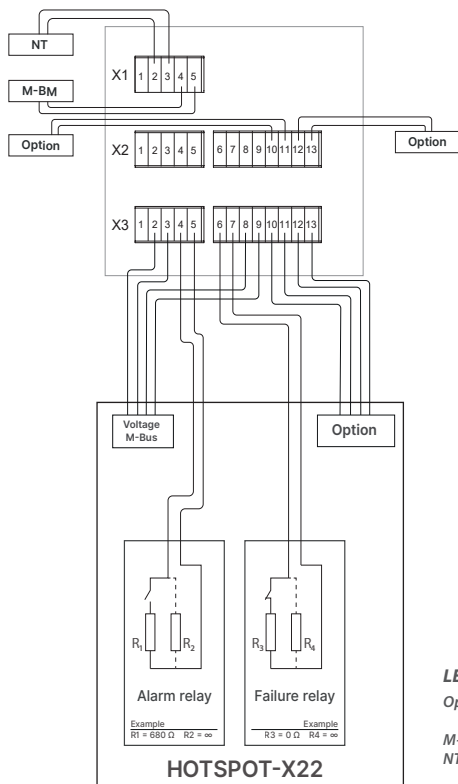

LEGEND:

- Option:** Fire panel interface to FDnet or LSNi (e.g. SIEMENS, BOSCH) or pre-alarm
- M-BM:** ADICOS M-BUSMASTER
- NT / USV:** External power supply / uninterruptible power supply

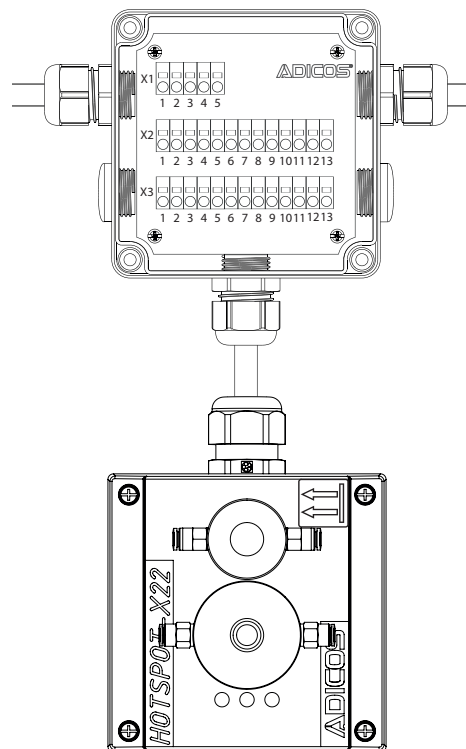

12-pin cable, LEONI KERPEN ICONBASE

Wire	Color	Signal	Limit value contact
1	black	Operating voltage	
1	white	DC 21,6 ... 40 V non-polarised	
2	black	Relay output X6 e	Alarm NO ¹
2	white	Relay output X6 a	Alarm NO ¹
3	black	Relay output X7 a	Fault NC
3	white	Relay output X7 e	Fault NC
4	black	M-Bus	
4	white	max. 40 V non-polarised	

¹ with series resistor

Option analog signal

Wire	Color	Signal	Analog signal
5	black	Analog Current	4 ... 20 mA
5	white	Analog Current	4 ... 20 mA
6	black		
6	white		

Option fire panel interface

Wire	Color	Siemens FDnet	Bosch LSNi
5	black	FDnet (+)	LSN a in
5	white	FDnet-A (-)	LSN b1 in
6	black	FDnet (+)	LSN a out
6	white	FDnet-B (-)	LSN b2 out

Option pre-alarm

Wire	Color	Auxiliary relay
5	black	-
5	white	Normally closed
6	black	Normally open
6	white	Common

12-pin cable, OELFLEX 415CP

Wire	Signal	Limit value Contact
1	Operating voltage	
2	DC 21,6 ... 40 V non-polarised	
3	M-Bus	
4	max. 40 V non-polarised	
5	Relay output X6 e	Alarm NO ¹
6	Relay output X6 a	Alarm NO ¹
7	Relay output X7 a	Fault NC
8	Relay output X7 e	Fault NC

¹ with series resistor

Option analog signal

Wire	Signal	Analog signal
9	Analog current	4 ... 20 mA
10	Analog current	4 ... 20 mA
11		
12		

Option fire panel interface


Wire	Siemens FDnet	Bosch LSNi
9	FDnet-A (-)	LSN b1 in
10	FDnet (+)	LSN a in
11	FDnet-B (-)	LSN b2 out
12	FDnet (+)	LSN a out

Option pre-alarm


Wire	Auxiliary relay
9	Normally closed
10	-
11	Common
12	Normally open

HOTSPOT-X22 – Application

ADICOS wiring principle

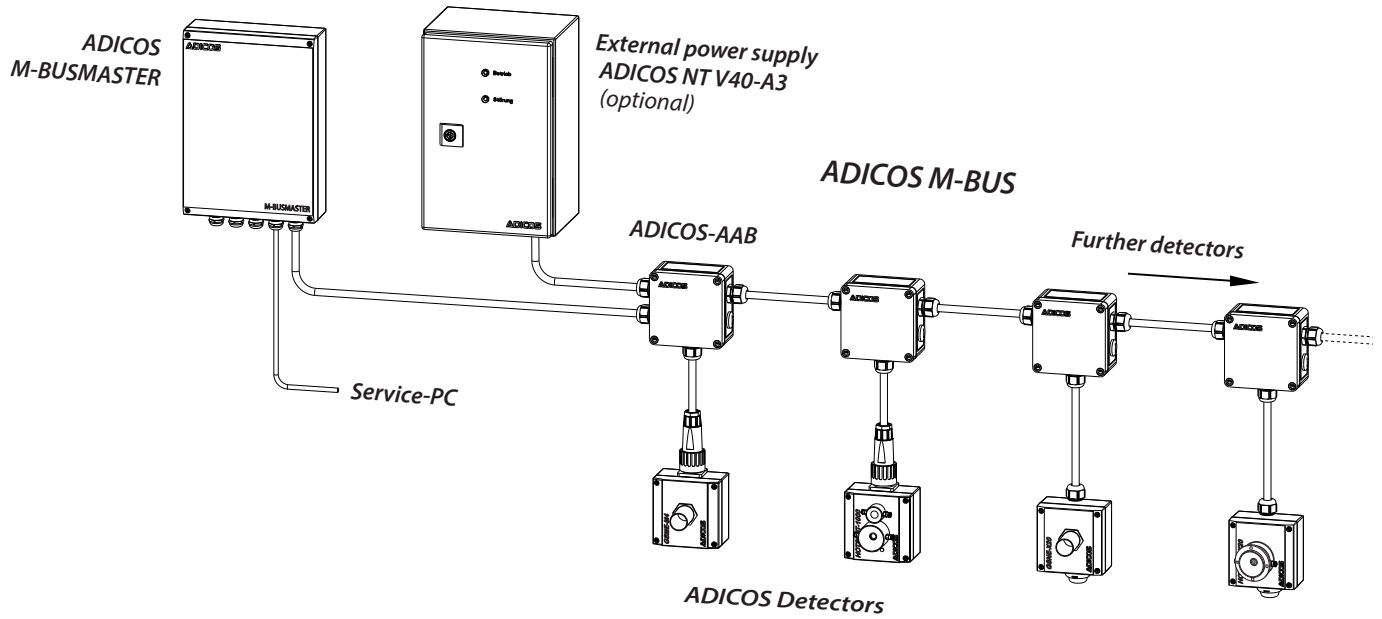

Application example

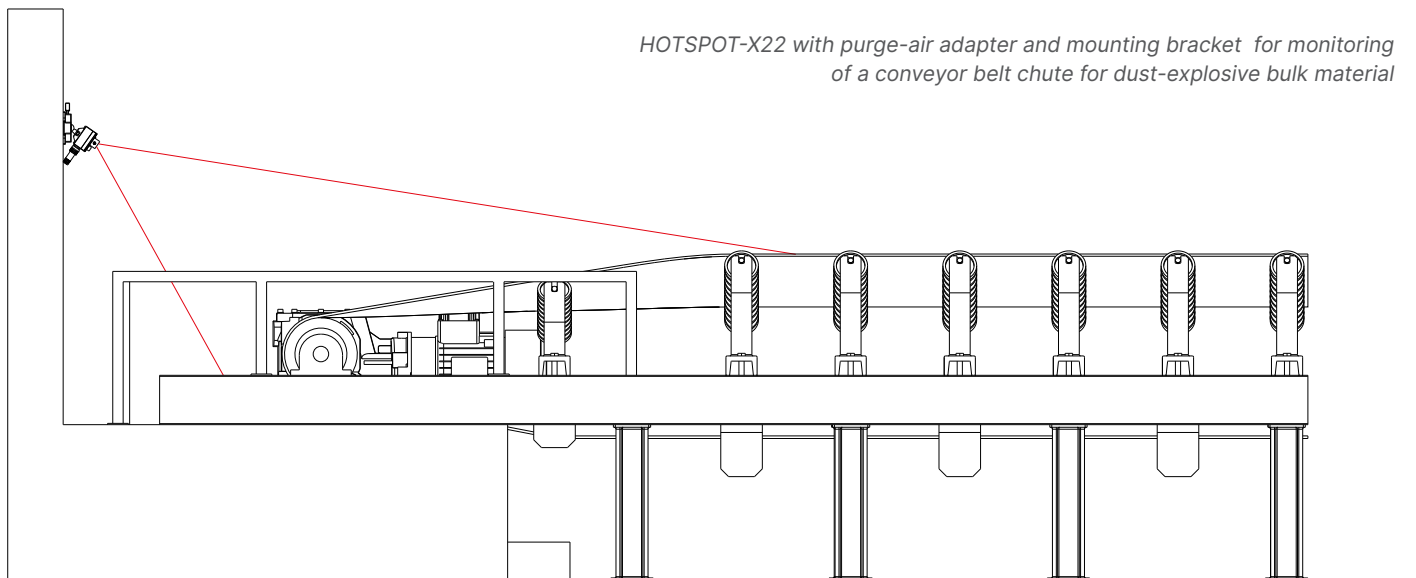

HOTSPOT mounting bracket with ball joint

